


## 1. Tools

You will need a pair of fine scissors, fine pliers and a knife with a new blade.

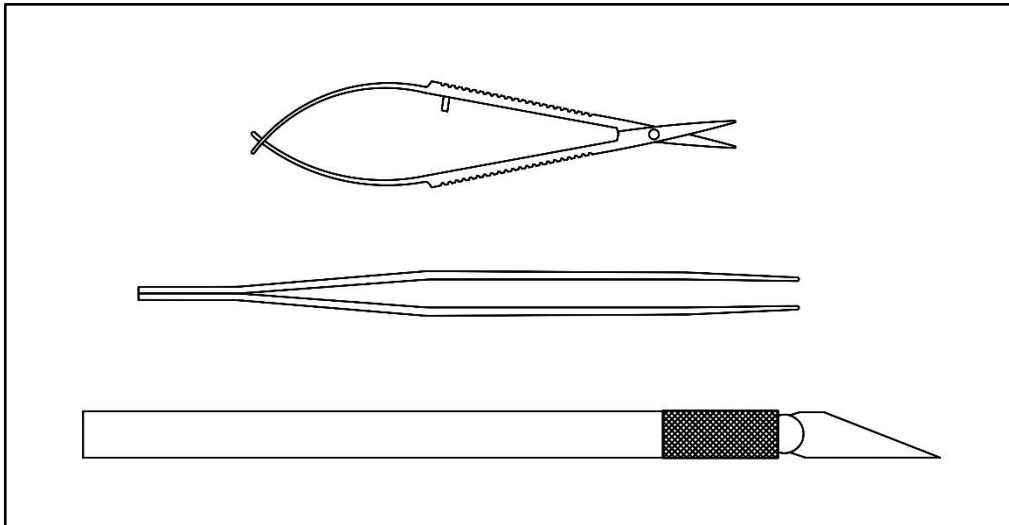

## 2. Remove the part from the packaging

The parts are glued to the bottom of the plastic packaging and covered with cotton wool to protect them from damage during transport. Remove gently the cotton wool with the fine pliers.

Simply pull with the fine pliers on the piece to detach it from the bottom of the packaging.

## 3. Remove supports

Cut the supports flush with the printed part using a pair of fine scissors. Always cut the supports of the thinnest elements of the printed part (barrels, handles, sight, etc.).

If there is a piece of support left on the printed part, cut it with a cutter with a new blade, not pressing excessively.

## 4. Bonding

The resin parts are glued together using Superglue.

## 5. Painting

Resin parts can be painted with both enamel and acrylic paint.

For all information: [info@swordfishmodels.com](mailto:info@swordfishmodels.com)

Swordfish models cannot be held responsible for damage to printed parts caused by mishandling during part preparation.

Always be very delicate: the resin parts are very fragile.